




280 Series Operating Up to 18 GHz

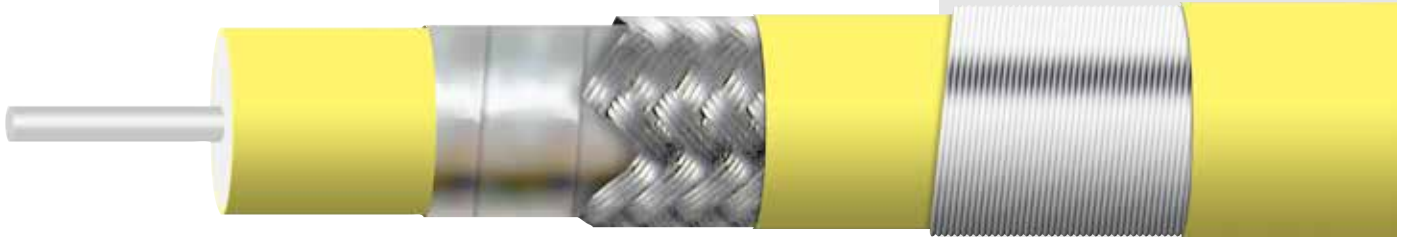

Center Conductor Silver Plated Copper 2801/2803 Solid 2806/2808 Stranded	Dielectric EPTFE	Foil Silver Plated Copper	Braid Silver Plated Copper	Outer Jacket FEP (7.74mm 0.305")	Serving SCCS Armor	Outer Jacket FEP (9.65mm 0.380")
--	----------------------------	--	---	---	------------------------------	---

	2801	2806	2803	2808
Electrical Characteristics				
Impedance	50 +/- 2Ω	50 +/- 2Ω	50 +/- 2Ω	50 +/- 2Ω
Cut Off Frequency (cable only, max)	19.5 GHz	18 GHz	19.5 GHz	18 GHz
Capacitance	24 pF/ft.	24 pF/ft.	24 pF/ft.	24 pF/ft.
Velocity of Propagation	83%	83%	83%	83%
Time Delay	1.22 ns/ft.	1.22 ns/ft.	1.22 ns/ft.	1.22 ns/ft.
Shielding Effectiveness up to 18GHz	>90 dB	>90 dB	>90 dB	>90 dB
Power Handling	See Chart	See Chart	See Chart	See Chart
Mechanical Characteristics:				
Weight	1.40 oz/ft (130g/m)	1.30 oz/ft (120g/m)	2.50 oz/ft (230g/m)	2.50 oz/ft (230g/m)
Minimum Bend Radius inches (mm)	1" (25.4mm)	1" (25.4mm)	1" (25.4mm)	1" (25.4mm)
Environmental Characteristics:				
Operating Temperature Range ¹	-65°C to +165°C	-65°C to +165°C	-65°C to +165°C	-65°C to +165°C
RoHS (2002/95/EC)	Available on request	Available on request	Available on request	Available on request
¹ +200°C available on request				
VSWR for assemblies with two straight connectors	1.35:1 to 18 GHz	1.35:1 to 18 GHz	1.35:1 to 18 GHz	1.35:1 to 18 GHz
VSWR for assemblies with one straight and one right angle connector	1.40:1 to 18 GHz	1.40:1 to 18 GHz	1.40:1 to 18 GHz	1.40:1 to 18 GHz
VSWR for assemblies with two right angle connectors	1.45:1 to 18 GHz	1.45:1 to 18 GHz	1.45:1 to 18 GHz	1.45:1 to 18 GHz



280 Series (Continued)

Attenuation (max)

GHz	2801/2803			2806/2808		
	dB/ft.	dB/m	Power(W) @ 20°C @ Sea Level	dB/ft.	dB/m	Power(W) @ 20°C @ Sea Level
0.04	0.009	0.028	2500	0.011	0.036	2000
1	0.044	0.145	1900	0.057	0.187	1500
2	0.063	0.206	1350	0.081	0.266	1100
4	0.090	0.295	900	0.117	0.384	700
6	0.111	0.365	750	0.144	0.472	600
8	0.130	0.425	650	0.168	0.551	500
10	0.146	0.479	600	0.189	0.620	450
12	0.161	0.528	580	0.208	0.682	400
14	0.175	0.574	550	0.227	0.909	380
16	0.188	0.617	525	0.243	0.797	350
18	0.200	0.657	450	0.260	0.853	340

